

# CONCRETE MIXER

## Lescha

CONCRETE MIXER LESCHA ARE  
WORLD WIDE, WELL KNOWN FOR ITS  
HIGH QUALITY AND RELIABILITY

### Advantages:

- » Quality at an affordable price
- » Easy to empty drum
- » Balanced arrangement of blades for optimum stirring
- » Specially designed shape of the drum
- » Adjustable backlash teeth
- » High-quality finish



Technical data:	<b>PROFI STAR 150</b>	
<b>Capacity:</b>	Drum capacity	130 liter
	Max. mixing capacity	110 liter
<b>Operation:</b>	Engine 230V/50Hz	0,5 kW
	Volume made in 10 mixing phase:	cca 0,7 m <sup>3</sup>
<b>Equipment:</b>	Steering wheel	
	Cast-iron wreath with shield	
	Plastic wheels	
	Folding	
<b>Weight:</b>		54 kg
<b>Dimensions:</b>		117 x 71 x 140 cm
<b>Version:</b>		230V / 50 Hz

ord.n. 35500 STAR 150 130l 230V/ 50 Hz

Technical data:	PROFI	SM 145	SM 165	SM 185
<b>Capacity:</b>	Drum capacity	140 litr	160 litr	180 litr
	Max. mixing capacity - dry mixture:	85 litr	96 litr	110 litr
	Max. mixing capacity - wet mixture:	105 litr	120 litr	135 litr
<b>Operation:</b>	Engine 220V/50Hz	0,5 kW	0,5 kW	1,0 kW
	Engine 380V/ 50 Hz	0,5 kw	0,5 kW	1,0 kW
	Volume made in 10 mixing phase:	cca 0,8 m <sup>3</sup>	cca 1,0 m <sup>3</sup>	cca 1,1 m <sup>3</sup>
<b>Equipment:</b>		Steering wheel	Steering wheel	Steering wheel
		Leg break (on order)	Leg break	Leg break
		Cast-iron wreath	Cast-iron wreath	Cast-iron wreath
		Plastic wheels	Rubber wheels	Rubber wheels
<b>Weight:</b>		61,5 kg, 69 kg <small>version with leg break</small>	83,5 kg	101,5 kg
<b>Dimensions:</b>		132 x 71,5 x 133 cm	132 x 83 x 141 cm	146 x 83 x 140 cm
<b>Version:</b>		230V a 400V / 50 Hz	230V a 400V / 50 Hz	230V a 400V / 50 Hz

ord.n. 35505	<b>SM 145 S</b> 140L/ 230V	ord.n. 35511	<b>SM 165 S</b> 160 L/ 400V
ord.n. 35506	<b>SM 145 S</b> 140L/ 400V	ord.n. 35512	<b>SM 165 G</b> benzínová
ord.n. 35507	<b>SM 145 S</b> 140L/ 230V *NB	ord.n. 35514	<b>SM 185 S</b> 180L/ 230V
ord.n. 35508	<b>SM 145 S</b> 140L/ 400V *NB	ord.n. 35515	<b>SM 185 S</b> 180L/ 400V
ord.n. 35510	<b>SM 165 S</b> 160 L/ 230V		


\*Leag Break



### Technická data: Throwing basket

For all types of bulding mixers

ord.n. 35560 ◊ 20 x 24 mm

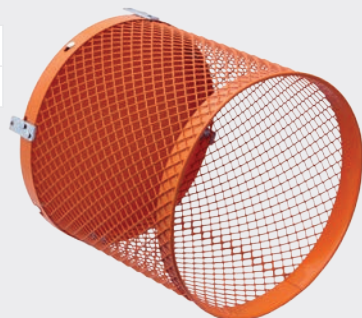

**Technical data: PROFI EURO MIX 125**

<b>Capacity:</b>	Drum capacity	130 liter
	Max. mixing capacity - dry mixture:	80 liter
	Max. mixing capacity - wet mixture :	97 liter
<b>Operation:</b>	Engine 230V/ 50Hz	0,5 kW
	Engine 400 V/ 50Hz	0,5 kW
	Volume made in 10 mixing phase:	cca 0,7 m <sup>3</sup>
<b>Equipment:</b>	Steering wheel, Cast-iron wreath with shield	
	Plastic wheels, Folding	
<b>Weight:</b>		55,5 kg
<b>Dimensions:</b>	Assembled:	113x71,5x133 cm
	Un-assembled:	113x71,5x96 cm
<b>Version:</b>		230V / 50 Hz a 400V/ 50



ord.n. 35502 **EURO MIX 125** 230V/ 50 Hz

ord.n. 35503 **EURO MIX 125** 400V/ 50 Hz

**Technická data: PROFI S 180 S 230**

<b>Capacity:</b>	Drum capacity	180 liter	225 liter
	Max. mixing capacity - dry mixture:	80 liter	140 liter
	Max. mixing capacity - wet mixture:	97 liter	175 liter
<b>Operation:</b>	Engine 230V/50Hz	1,6 kW	1,6 kW
	Engine 400V/50Hz	1,25 kW	1,25 kW
	Volume made in 10 mixing phase:	cca 1,1 m <sup>3</sup>	cca 1,4m <sup>3</sup>
<b>Equipment:</b>	Steering wheel, Sturdy frame, Tipping of drum easier by transmission 1:5		
	Leg break, Cast-iron wreath, Rubber wheels		
<b>Weight:</b>		106 kg	126,5 kg
<b>Dimensions:</b>		155 x 83 x 139 cm	155 x 83 x 144 cm
<b>Version:</b>		230V/ 50 Hz a 400V/ 50 Hz	230V/ 50 Hz a 400V/ 50 Hz



order n. 35516 **S 180 HR** 130 l/ 230 V

order n. 35517 **S 180 HR** 130 l/ 400 V

order n. 35518 **S 230 HR** 225 l/ 230 V

order n. 35519 **S 230 HR** 225 l/ 400 V

# Lescha

## HOBBY

### Technical data: **HOBBY** **ABM 135**

<b>Capacity:</b>	Drum capacity	130 liter
	Max. mixing capacity - dry mixture:	80 liter
	Max. mixing capacity - wet mixture :	97 liter
<b>Operation:</b>	Engine 230V/ 50Hz	0,5 kW
<b>Equipment:</b>	Steering wheel	
	Wreath from perforated sheet	
	Plastic/ Rubber wheels	
	Folding	
<b>Weight:</b>		47,5 kg
<b>Dimensions:</b>		122 x 70 x 128 cm
<b>Version:</b>		230V / 4 - poling

order n. 35504 **ABM 135** 230 V/ 50 Hz



### Technical data: **HOBBY** **BX 135**

<b>Capacity:</b>	Drum capacity	130 liter
	Max. mixing capacity - dry mixture:	80 liter
	Max. mixing capacity - wet mixture :	97 liter
<b>Operation:</b>	Engine 230V/50Hz	0,5 kW
	Volume made in 10 mixing phase:	cca 0,7 m <sup>3</sup>
<b>Equipment:</b>	Steering wheel	
	Wreat from perforated sheet	
	Rubber wheel	
<b>Weight:</b>		49 kg
<b>Dimensions:</b>		113x71,5x 96 cm
<b>Version:</b>		230V / 50 Hz

order n. 35501 **BX 135** 230 V/ 50 Hz





# Lescha

### CONSTRUCTION DEBRIS CHUTE

For economic and practical reasons, plastic parts made of polyethylene having a specific density that makes them resistant to shock and aging (embrittlement) plastic. Construction debris chute are an excellent tool when working in residential areas, the renovation of older buildings, attics and the like. The sliding mounting frame allows all types of window frames. For safe use is permitted load up one frame casts the maximum length of 10m, at greater length must be used more supporting frame. The wall thickness is 4.5 mm drop.

**35601**  
**Hooper 13 kg**



**35600**  
**Chute, Base part 9 kg**



**35602**  
**Mounting Frame 16 kg**



### Technical data:

Chute, Base part, - Outside diameter 50 cm, - Inside diameter 40 cm, - Length 1,10m

Mounting frame, - Fixing on wall till 0,47m

# **Lescha**

**For over 100 years your partner in the construction!**

Building industry puts emphasis on correct and perfect mixing concrete and mortar mixes. Focusing only on the construction of technical features, comfort comes in short. If we put in the forefront Operationally, we do not achieve the required performance. Mixers Lescha do both, even more so! With many technical details is one of the most efficient and safest in its class.

- » **Quality at an affordable price**
- » **No maintenance drive the front wheels (Power Box)**
- » **Powerful motor-filled drum starts, also at 15% undervoltage**
- » **The tooth crown made of cast iron, safely protected against shocks, with patented mounting**
- » **Adjustable backlash teeth**
- » **Splash protection IP 45**
- » **High-quality powder coating (safe for the environment).**
- » **Specially designed shape of the drum - no dead spots, no sorting, residue-free emptying**
- » **Shock resistant motor casing from recyclable plastics**
- » **Ergonomically rendered handwheel**
- » **For electro-mixers patented insulation protection, safe for direct connection to any electrical network (no current distributor construction). Quality protection according to DIN EN ISO 9001**
- » **Bearings of drum on the bottom of drum, low bearing loads (double storage)**
- » **Supplied in 220V and 380V**
- » **Hand wheel with multi - notch system or continuously variable Performers foot brake**

